



### Since December 2004, the double floor rail has been standard equipment on the ATD II flush version.

Previous versions (DP and DPA) have no longer been available since this date.

**Rail : Non-return** on the sides. (Flat railsurface with no catching points).

**Weight improvement** : 50 kg/rail DPA (90 kg/rail DP)

**Better insulation** (Reduced footprint).


**Visual markers** on the rails for **horizontal adjustment** of the beams.

**Adjustable beams** 25 by 25 mm.

**Locking rod incorporated** in the first rail.

**New beams** (Specific end fittings).

**Weight improvement** : 2 kg/beam (44 kg/semi)

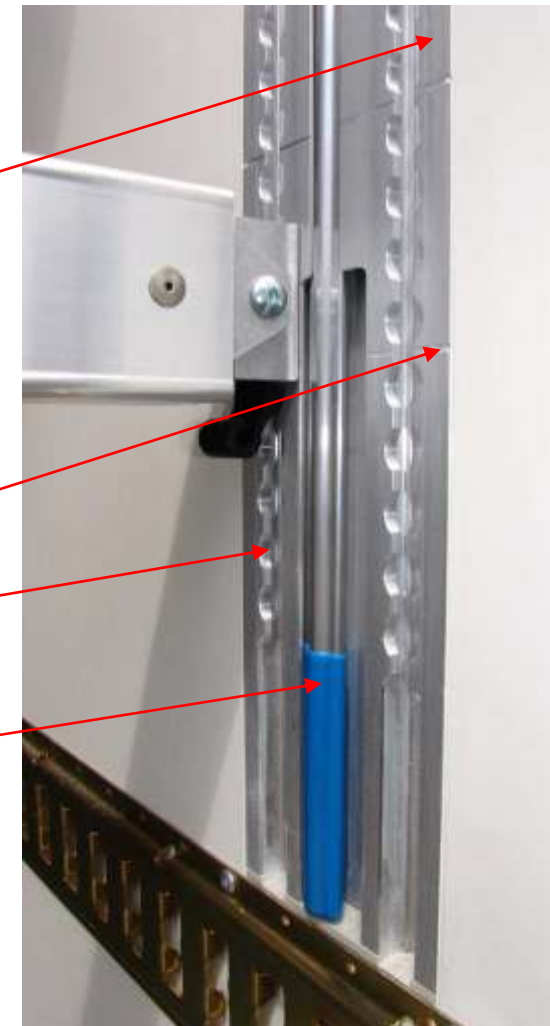

Reliable

Ergonomic

Lightweight

**CHEREAU  
exclusiv !**


**CHEREAU**

## ATD II Rail

Reliable

Ergonomic

Lightweight



**25 mm spacing between each position**

**Height markers**

